





SPECIFICATIONS

BRS-61240/40S
BRS-62440/40S

TYPE: ----- DIGITAL
DISPLAY: ----- 6-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED
CHARACTER HEIGHT: ----- 4" (101.6 mm) HRS / MIN / SEC
VISIBILITY: ----- 250 Ft. (76.2 METERS)
POWER REQUIREMENTS:-- 1500 ma AT 9 VAC (**TRANSFORMER SUPPLIED**)
FRAME: ----- ALUMINUM (**BLACK ANODIZED FINISH**)
DIMENSIONS: ----- 8.25" x 24.25" x 1.375"
WEIGHT: ----- 6.5 lb.
OPERATING TEMP.: ----- -17° TO 182° F
HUMIDITY: ----- 0% TO 95% NON-CONDENSING
OPERATING MODE:----- RS-485 WITH DDS PROTOCOL

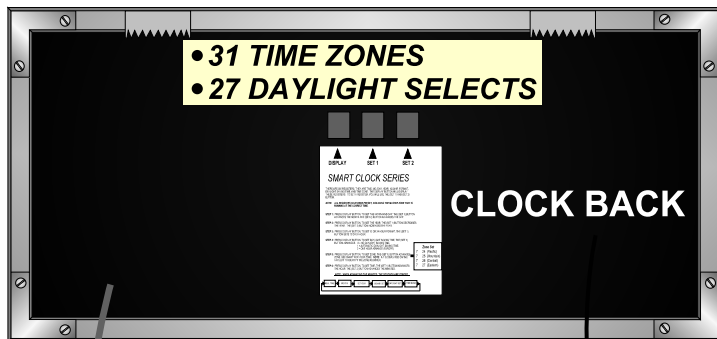


SIGNAL CABLE
Category 2 UPT- type



(+) SIDE
BLUE
ORANGE
GREEN

(-) SIDE
WHITE/BLUE
WHITE/ORANGE
WHITE/GREEN



Wall or Internal Transformer,
Customer to specify.

- 12 OR 24 HOUR FORMAT
- NON GLARE LENS
- SUPER BRIGHT LEDS
- ALUMINUM FRAME
- AUTOMATIC DAY LIGHT CORRECTION

MOUNTING INSTRUCTIONS

