



BSA-41218



BSA-41225

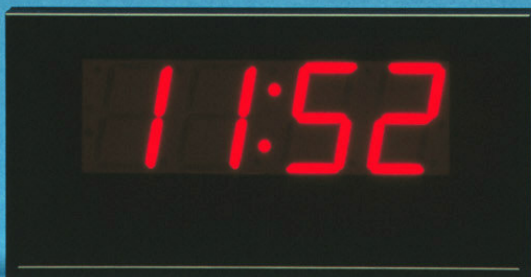


BSA-41240

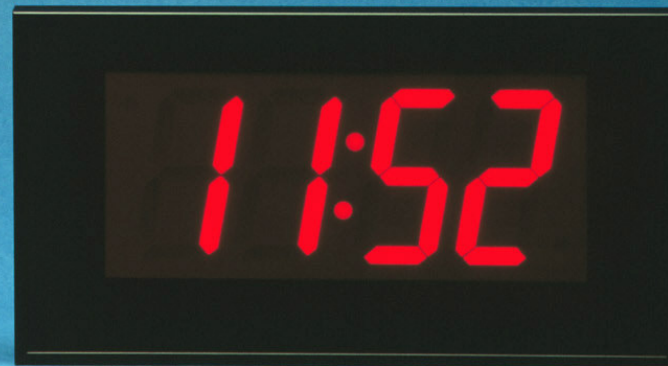


SPECIFICATIONS

- TYPE: ----- DIGITAL
- DISPLAY: ----- 4-DIGIT, 7 SEGMENT SUPER BRIGHT LED'S
- CHARACTER HEIGHT: ----- 1.8" (45.72mm) HR/MIN **BSA-41218**
 2.5" (63.5mm) HR/MIN **BSA-41225**
 4" (101.6mm) HR/MIN **BSA-41240**
- VISIBILITY: ----- 75 Feet (22.86 METERS) **BSA-41218**
 125 Feet (38.1 METERS) **BSA-41225**
 200 Feet (60.96 METERS) **BSA-41240**
- POWER REQUIREMENTS: ----- 1.5 A AT 9VAC **(TRANSFORMER SUPPLIED).**
- FRAME: ----- ALUMINUM **(BLACK ANODIZED FINISH)**
- DIMENSIONS: ----- 6.25" x 12.25" x 1.375" **BSA-41218**
 6.25" x 12.25" x 1.375" **BSA-41225**
 8.25" x 15.25" x 1.375" **BSA-41240**
- WEIGHT: ----- 5.25 lbs.
- OPERATING TEMP.: ----- -17° TO 190° F
- HUMIDITY: ----- 0% TO 95% NON-CONDENSING

12 OR 24 HOUR FORMAT, NON-GLARE LENS, SUPER BRIGHT LED'S, ALUMINUM FRAME
 10 YEAR LITHIUM BATTERY BACKUP **(Standard)**
 AUTOMATIC DAY LIGHT CORRECTION **(Standard)**
 ONE SEC A YEAR ACCURACY (TCXO) **(Standard)**

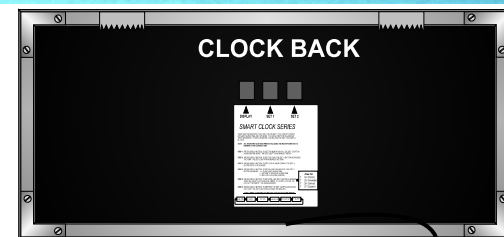

ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY.



MOUNTING INSTRUCTIONS

