

SPECIFICATIONS

DSA-42470-R


- TYPE: ----- DIGITAL
- DISPLAY: ----- 4-DIGIT, 7 SEGMENT LED (**RED SUPER BRIGHT**)
- CHARACTER HEIGHT: ----- 7" (177.8mm) HR / MIN
- VISIBILITY: ----- 500 + Ft. (152.4 Meters)
- POWER REQUIREMENTS: -- 100-240V 50~60Hz (**12vdc Switching Power Supply**)
- FRAME: ----- ALUMINUM (BLACK ANODIZED FINISH)
- DIMENSIONS: ----- 12.25" x 28.25" x 1.35"
- WEIGHT: ----- 10 lbs. **NEW 1 SEC A YEAR ACCURATE (TCXO)**
- OPERATING TEMP.: ----- -17° TO 195° F
- HUMIDITY: ----- 0% TO 95% NON-CONDENSING

ALL CLOCKS US THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY.



Cold or Hot
World's Most Accurate RTC


NOTCHED / EYELET HANGERS AND WALL TRANSFORMER ARE STANDARD

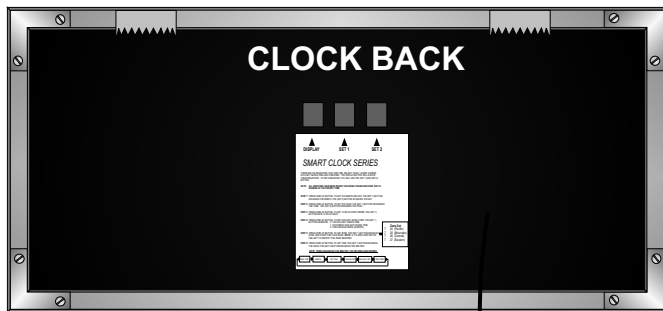


- 12 OR 24 HOUR FORMAT
- NON GLARE LENS
- SUPER BRIGHT LEDS
- ALUMINUM FRAME

- 10 YEAR LITHIUM BATTERY BACKUP (**Standard**)
- AUTOMATIC DAY LIGHT CORRECTION (**Standard**)
- ONE SEC A YEAR ACCURACY (TCXO) (**Standard**)

MOUNTING INSTRUCTIONS

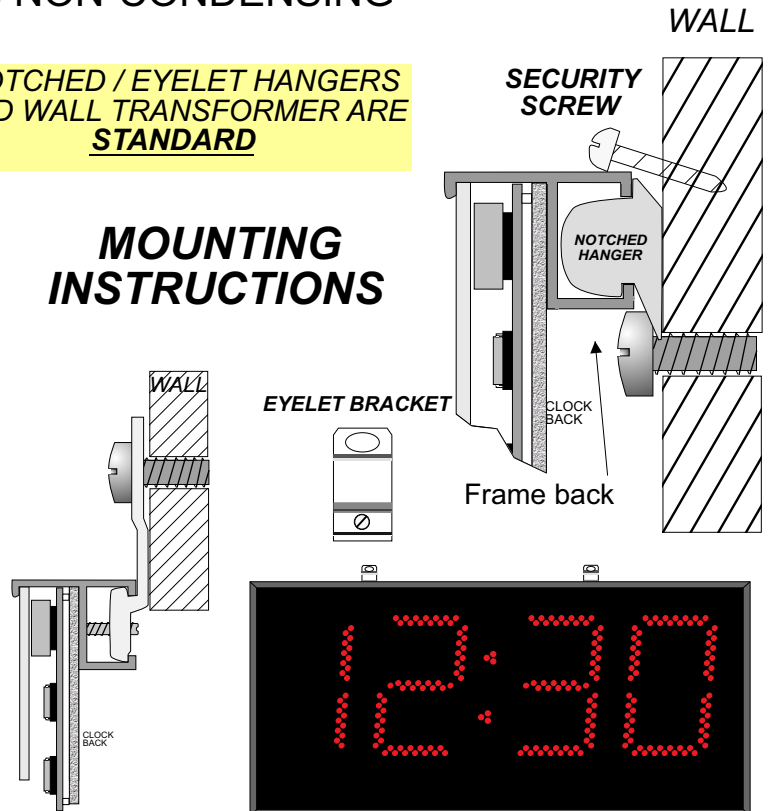

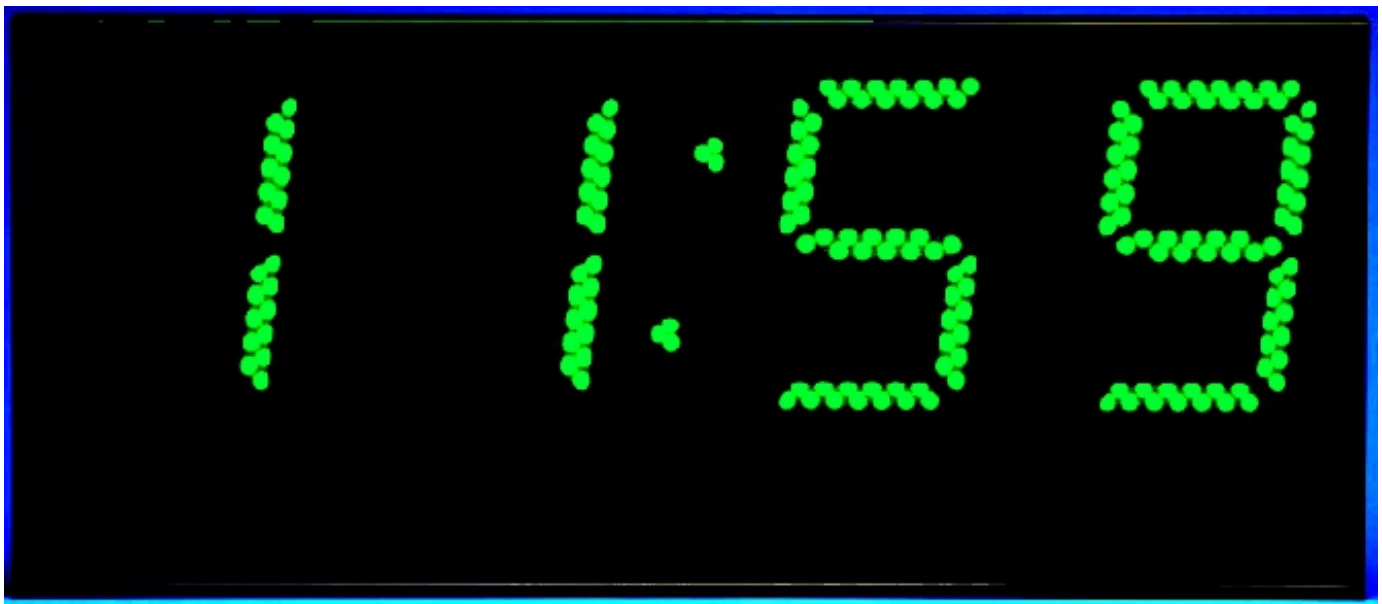

DSA-42470-G

SPECIFICATIONS

TYPE: -----	DIGITAL
DISPLAY: -----	4-DIGIT, 7 SEGMENT LED (GREEN SUPER BRIGHT)
CHARACTER HEIGHT: -----	7" (177.8mm) HR / MIN
VISIBILITY: -----	500 + Ft. (152.4 Meters)
POWER REQUIREMENTS: --	100-240V 50~60Hz (12vdc Switching Power Supply)
FRAME: -----	ALUMINUM (BLACK ANODIZED FINISH)
DIMENSIONS: -----	12.25" x 28.25" x 1.35"
WEIGHT: -----	10 lbs.
OPERATING TEMP.: -----	-17° TO 195° F NEW 1 SEC A YEAR ACCURATE (TCXO)
HUMIDITY: -----	0% TO 95% NON-CONDENSING


ALL CLOCKS US THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY.



NOTCHED / EYELET HANGERS AND WALL TRANSFORMER ARE STANDARD






MOUNTING INSTRUCTIONS

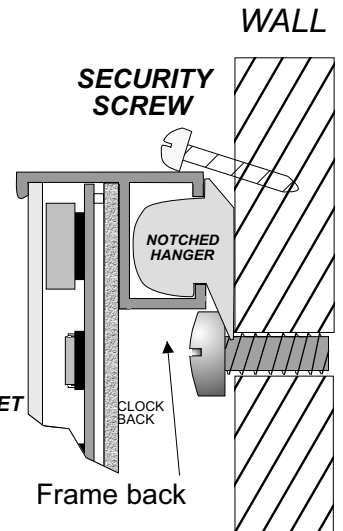

- 12 OR 24 HOUR FORMAT
- NON GLARE LENS
- SUPER BRIGHT LEDS
- ALUMINUM FRAME

- 10 YEAR LITHIUM BATTERY BACKUP (**Standard**)
- AUTOMATIC DAY LIGHT CORRECTION (**Standard**)
- ONE SEC A YEAR ACCURACY (TCXO) (**Standard**)

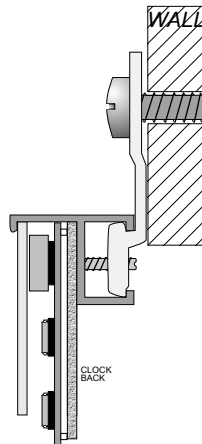

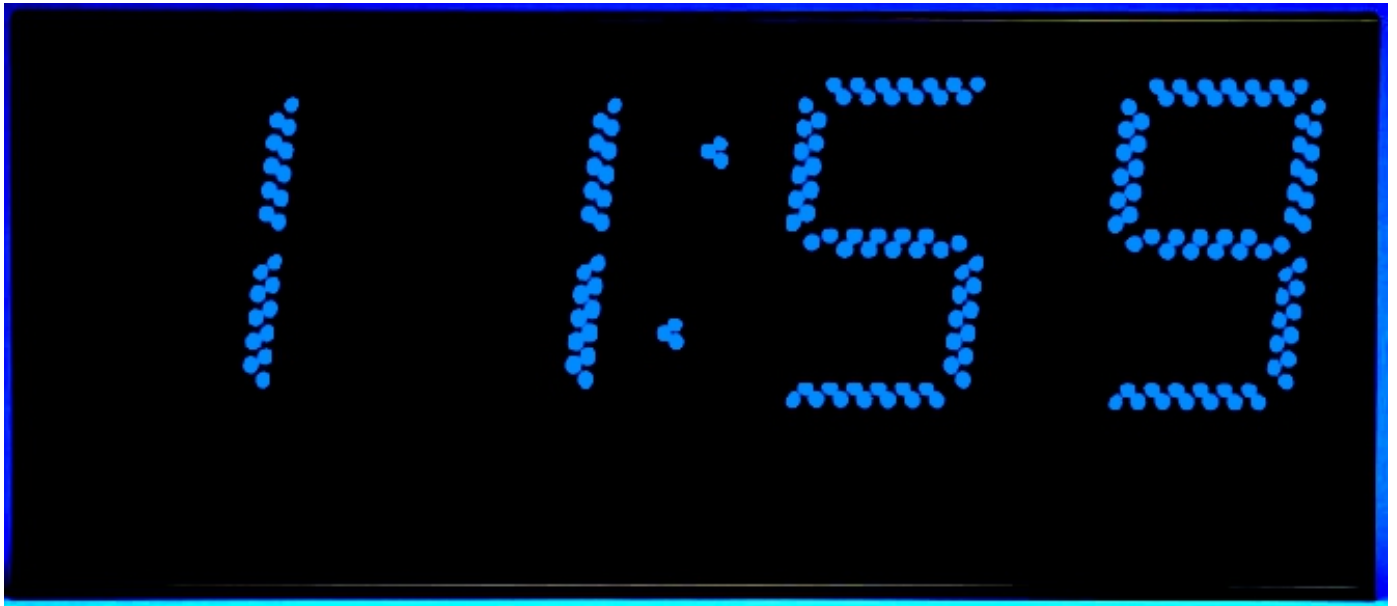

SPECIFICATIONS


DSA-42470-B

- TYPE: ----- DIGITAL
- DISPLAY: ----- 4-DIGIT, 7 SEGMENT LED (**BLUE SUPER BRIGHT**)
- CHARACTER HEIGHT: ----- 7" (177.8mm) HR / MIN
- VISIBILITY: ----- 500 + Ft. (152.4 Meters)
- POWER REQUIREMENTS: -- 100-240V 50~60Hz (**12vdc Switching Power Supply**)
- FRAME: ----- ALUMINUM (BLACK ANODIZED FINISH)
- DIMENSIONS: ----- 12.25" x 28.25" x 1.35"
- WEIGHT: ----- 10 lbs. **NEW 1 SEC A YEAR ACCURATE (TCXO)**
- OPERATING TEMP.: ----- -17° TO 195° F
- HUMIDITY: ----- 0% TO 95% NON-CONDENSING


ALL CLOCKS US THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY.

World's Most Accurate RTC

NOTCHED / EYELET HANGERS AND WALL TRANSFORMER ARE STANDARD

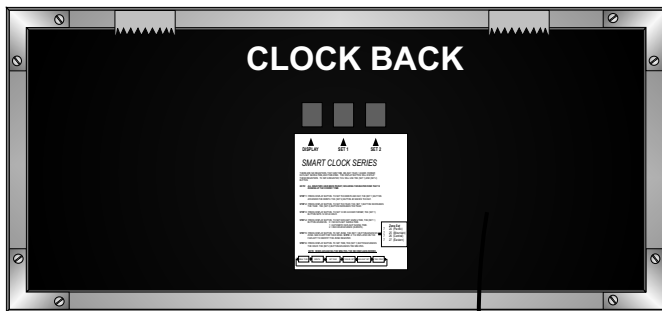

MOUNTING INSTRUCTIONS

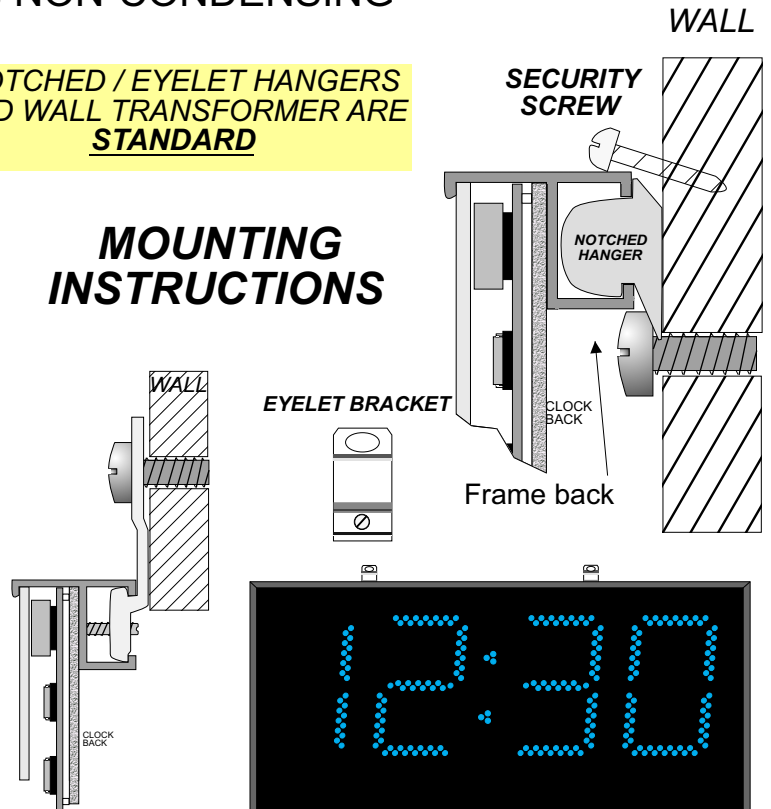

- 12 OR 24 HOUR FORMAT
- NON GLARE LENS
- SUPER BRIGHT LEDS
- ALUMINUM FRAME
- 10 YEAR LITHIUM BATTERY BACKUP (**Standard**)
- AUTOMATIC DAY LIGHT CORRECTION (**Standard**)
- ONE SEC A YEAR ACCURACY (TCXO) (**Standard**)

